

RF Wireless CCT Dimmer SR-2833CCT



Feature

- SR-2833CCT is RF Wireless CCT Dimmer.
- 4 different zones independently or in a group.

Parameter


Remote

Part No.	Operation Voltage	Operation Frequency	DIMENSIONS ø/h (mm)	Remarks
SR-2833CCT	3VDC	434MHz/868MHz	39X136.5X10.7	Battery CR2025


Receiver

Part No.	Input Voltage	Current	Output	Remarks
SR-2833CCT RECEIVER	12-24VDC	3A	36-72W	Constant voltage


Product Size

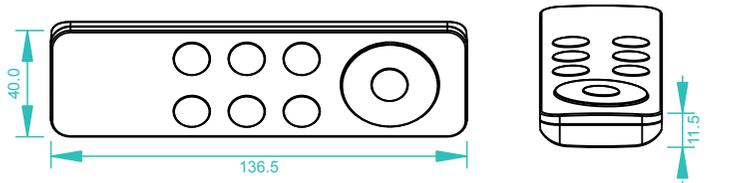

Wiring diagram

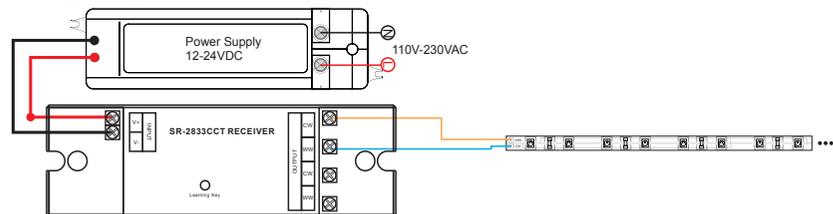

Brief introduction of buttons

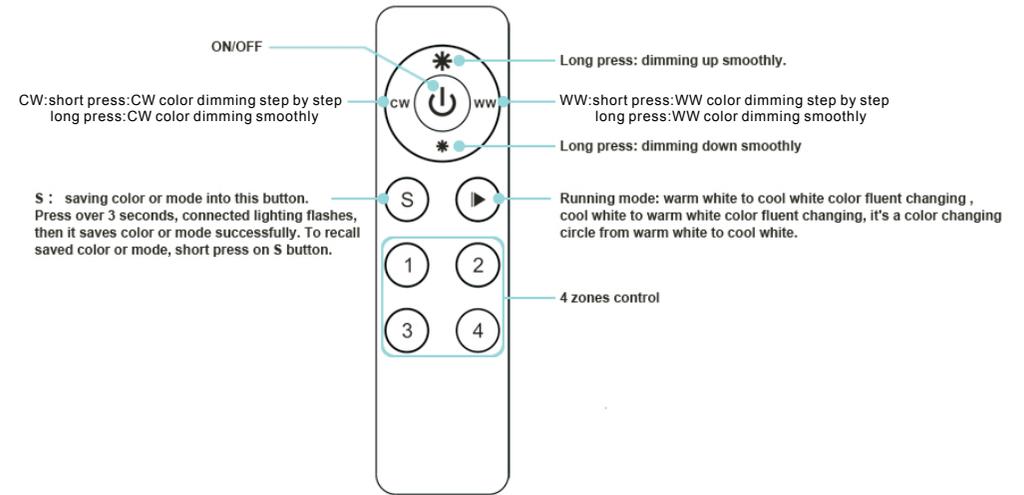

Operation

After you have wired all the receivers according to Figure illustration you need to do the following:

1. Pull off the plastic film cover of the battery at the back of remote.

2. If you use multiple receivers, you have 2 choices:

Have all receivers in the same zone like Zone 1 for example or

Have each receiver in a different zone, like Zone 1, 2, 3 and so on

3. In order to pair each receiver to know what Zone it belongs to, you will need match it to the zone you wish to use: short press the Learning Key on the receiver, then immediately short press the zone button 1 or 2 or 3 or 4 you wish to use. Once you do that, the receiver output connected lighting will flash at 1 time. Then your remote and receiver are paired successfully. Short press on zone button to turn ON/OFF, long press on zone button to turn UP/DOWN.

4. Learn more receivers into same zone.

This wireless receiver can be learned into any zone (4 zones) . It has a special "Learning Key" that will enable you to pair it to any of the 4 zones by RF remote. You can learn lots of receivers into zones as you wish. Each zone can learn endless number of receivers.

Memory Reset:

In case you want to learn receiver into another zone, press the learning function button for 10 seconds until the receiver's connected lighting off. Then the memory is deleted. So you can do the above learning operation, to learn it into another zone.

Re-Assign Zone:

Re assigning the receiver to a different zone is easy, just press for less than 1 second the learning button on the receiver and then press any zone button that you would like to re-assign the receiver (Zone 4).

Safety & Warnings

- 1) The product shall be installed and serviced by a qualified person.
- 2) IP20. Please avoid the sun and rain. When installed outdoors, please ensure it is mounted in a water proof enclosure.
- 3) Always be sure to mount this unit in an area with proper ventilation to avoid overheating.
- 4) Please check if the output voltage of any LED power supplies used comply with the working voltage of the product.
- 5) Never connect any cables while power is on and always assure correct connections to avoid short circuits before switching on.
- 6) Please ensure that the cable is secured tightly in the connector
- 7) For update information please consult your supplier.

Warranty Agreement

- 1) We provide lifelong technical assistance with this product:
 - 3-year warranty. We print date on every products, for example :1125 means year 2011, week 25. The warranty is for free repair or replacement and covers manufacturing faults only.
 - For faults beyond the 3-year warranty we reserve the right to charge for time and parts.
- 2) Limited Warrenty
 - Any defects caused by wrong operation.
 - Any damages caused by unauthorized removal, maintenance, modifying, incorrect connection and replacement of chips.
 - Any damages due to transportation, vibration etc. after purchase.
 - Any damages caused by earthquake, fire, lightning, pollution and abnormal voltage.
 - Any damages caused by negligence, inappropriate storing at high temperatures and humidity or near harmful chemicals.
 - Product has been updated
- 3) Repair or replacement as provided under this warranty is the exclusive remedy to the customer.