



■ Features :


- Universal AC input / Full range (up to 305VAC)
- Built-in active PFC function
- * High efficiency up to 95%
- Protections: Short circuit / Over current / Over voltage / Over temperature
- Cooling by free air convection
- OCP point adjustable through output cable or internal potentiometer
- IP67 / IP65 design for indoor or outdoor installations
- Three in one dimming function (1~10Vdc or PWM signal or resistance)
- Suitable for LED lighting and street lighting applications
- · Compliance to worldwide safety regulations for lighting
- Suitable for dry / damp / wet location
- 5 years warranty (Note.10)



















HLG-320H-12 A

Blank: IP67 rated. Cable for I/O connection.

- A: IP65 rated. Output voltage and constant current level can be adjusted through internal potentiometer.
- B: IP67 rated. Constant current level adjustable through output cable with 1~10Vdc or PWM signal or resistance.
- C: Terminal block for I/O connection. Output voltage and constant current level can be adjusted through internal

D (option): IP67 rated. Timer dimming function, contact MEAN WELL for details.

SPECIFICATION

MODEL		HLG-320H-12	HLG-320H-15	HLG-320H-20	HLG-320H-24	HLG-320H-30	HLG-320H-36	HLG-320H-42	HLG-320H-48	HLG-320H-54				
	DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V				
	CONSTANT CURRENT REGION Note.4	6~12V	7.5 ~ 15V	10 ~ 20V	12 ~ 24V	15 ~ 30V	18 ~ 36V	21 ~ 42V	24 ~ 48V	27 ~ 54V				
	RATED CURRENT	22A	19A	15A	13.34A	10.7A	8.9A	7.65A	6.7A	5.95A				
	RATED POWER	264W	285W	300W	320.16W	321W	320.4W	321.3W	321.6W	321.3W				
	RIPPLE & NOISE (max.) Note.2	150mVp-p	150mVp-p	150mVp-p	150mVp-p	200mVp-p	250mVp-p	250mVp-p	250mVp-p	350mVp-p				
	VOLTAGE ADJ. RANGE Note.6			17 ~ 22V	21 ~ 26V	26 ~ 32V	32 ~ 39V	38 ~ 45V	43 ~ 52V	49 ~ 58V				
OUTPUT		Can be adjust	ed by internal	potentiometer A	A type and C ty	pe only	1	1	1	1				
	CURRENT ADJ. RANGE	11 ~ 22A	9.5 ~ 19A	7.5 ~ 15A	6.67 ~ 13.34A	5.35 ~ 10.7A	4.45 ~ 8.9A	3.8 ~ 7.65A	3.35 ~ 6.7A	2.97 ~ 5.95A				
	VOLTAGE TOLERANCE Note.3	±3.0%	±2.0%	±1.5%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%				
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	± 0.5%	± 0.5%	±0.5%	±0.5%	±0.5%				
	LOAD REGULATION	±2.0%	±1.5%	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	± 0.5%	±0.5%				
	SETUP, RISE TIME Note.8	2500ms,80m	s/115VAC 5	500ms,80ms/2	30VAC at full I	oad								
	HOLD UP TIME (Typ.)		5ms at full load 230VAC /115VAC											
	, ,,	90 ~ 305VAC 127 ~ 431VDC												
	FREQUENCY RANGE	47 ~ 63Hz												
	POWER FACTOR (Typ.)	PF>0.98/115VAC, PF>0.95/230VAC, PF>0.94/277VAC at full load (Please refer to "Power Factor Characteristic" curve)												
	TOTAL HARMONIC DISTORTION			ding≧50% at		,								
INPUT	EFFICIENCY (Typ.) (230Vac)	91%	92.5%	93.5%	94%	94%	94.5%	95%	95%	95%				
	EFFICIENCY (Typ.) (277Vac)	91.5%	93%	94%	94.5%	94.5%	95%	95%	95%	95%				
	AC CURRENT (Typ.)	3.5A / 115VAC 1.65A / 230VAC 1.45A / 277VAC												
	INRUSH CURRENT(Typ.)	COLD START 70A(twidth=1010 _{j/s} measured at 50% loeak) at 230VAC												
	LEAKAGE CURRENT	<0.75mA / 277VAC												
		95 ~ 108%												
	OVER CURRENT Note.4	Protection type : Constant current limiting, recovers automatically after fault condition is removed												
	SHORT CIRCUIT	Hiccup mode.												
PROTECTION		14 ~ 17V	17.5 ~ 21V	22.5 ~ 27V	27 ~ 33V	33 ~ 37V	40 ~ 46V	46.5 ~ 53V	53.5 ~ 60V	59 ~ 65V				
	OVER VOLTAGE	Protection tvp			p voltage, re-p	ower on to reco	over							
	OVER TEMPERATURE	Protection type: Shut down and latch off o/p voltage, re-power on to recover Shut down and latch off o/p voltage, re-power on to recover												
	WORKING TEMP.	-40 ~ +70°C (Refer to "Derating Curve")												
	WORKING HUMIDITY	20 ~ 95% RH non-condensing												
ENVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +80°C,		'9										
LINVINORMILINI	TEMP. COEFFICIENT	±0.03%/°C (
	VIBRATION	·	, ,	cle, period for 7	72min oach ald	ang V V 7 ayar								
	VIDRATION							37 (except for H	41 C-320H C tvi	ne) I61347-1				
	SAFETY STANDARDS Note.7	UL8750, CSA C22.2 No. 250.0-08, EN61347-1, EN61347-2-13 independent, IP65 or IP67 (except for HLG-320H C type), J61347-1,												
	WITHSTAND VOLTAGE	J61347-2-13 (except for HLG-320H C type) approved I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:1.5KVAC												
SAFETY &	ISOLATION RESISTANCE			0.2KVAC 0/										
EMC	EMC EMISSION	,	•	N55022 (CISPF			lace C (>50%	load) : EN610	nn_3_3					
	EMC IMMUNITY			2,3,4,5,6,8,11,1										
	MTBF	157.1K hrs mi				oozt, ngiit iilut	ion y iover (our	10 TILV), GIREI	IU D					
OTHERS	DIMENSION	157.1K hrs min. MIL-HDBK-217F (25°C) 252*90*43.8mm (L*W*H)												
JIILKO	PACKING		16Kg/0.92CUI	-T										
	All parameters NOT special	0. 1			ut rated load	and 25°C of a	mhient temper	ature						
NOTE	Ripple & noise are measure Tolerance : includes the part of the control	ed at 20MHz of	f bandwidth by	/ using a 12" t	wisted pair-wire				pacitor.					

- 4. Please refer to "DRIVING METHODS OF LED MODULE".
- 5. Derating may be needed under low input voltages. Please check the static characteristics for more details.

- 5. Defaulting finally be fleeted unlike low input voltages. Fleeted under the state of the state of the state of the state of the state.


 6. A type and C type only.

 7. Safety and EMC design refer to EN60598-1, subject CNS15233, GB7000.1, FCC part18.


 8. Length of set up time is measured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time.

 9. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.
- Refer to warranty statement.
- 11. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED power supply can only be used behind a switch without permanently connected to the mains




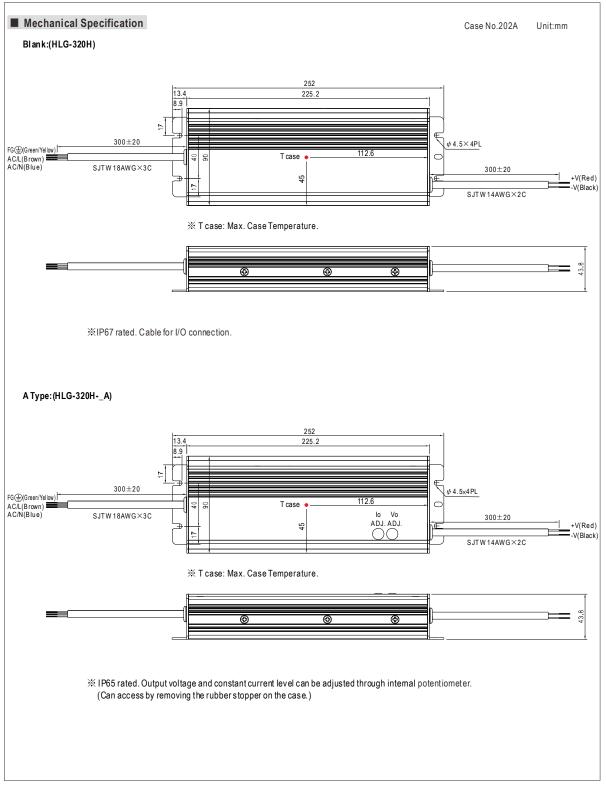



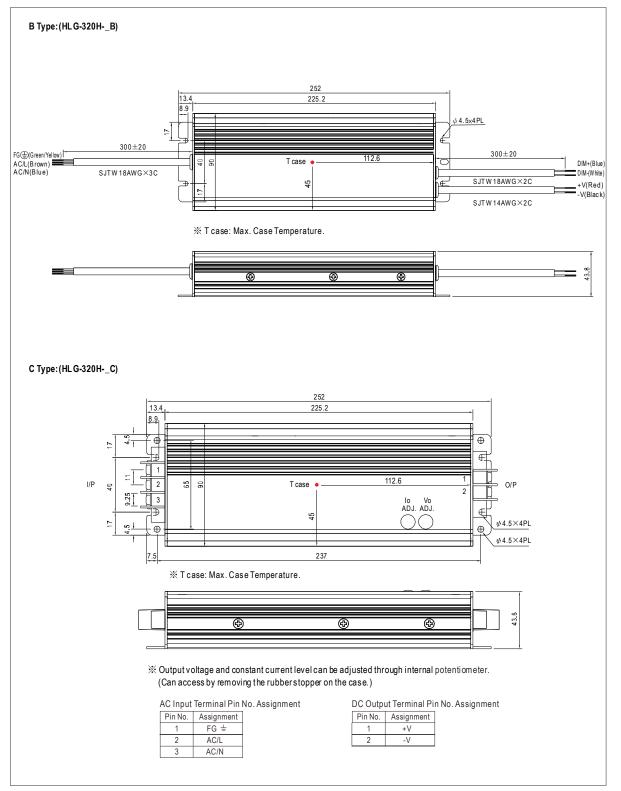




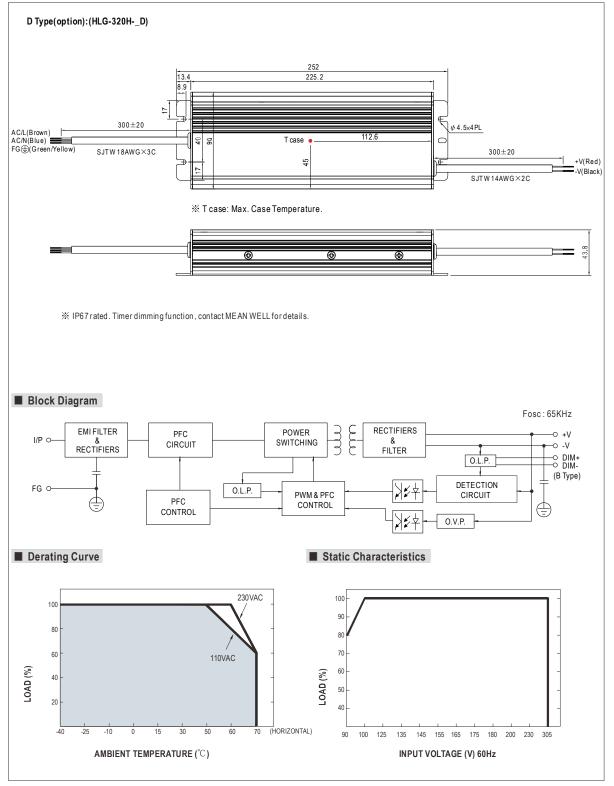




■ Power Factor Characteristic

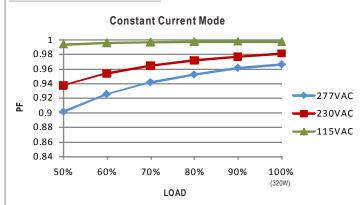

■ EFFICIENCY vs LOAD (48V Model)

HLG-320H series possess superior working efficiency that up to 95% can be reached in field applications.

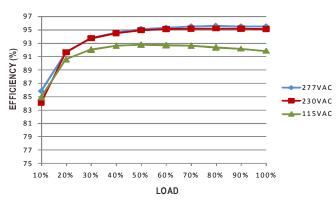


■ DRIVING METHODS OF LED MODULE

There are two major kinds of LED drive method "direct drive" and "with LED driver".

A typical LED power supply may either work in "constant voltage mode (CV) or constant current mode (CC)" to drive the LEDs.

Mean Well's LED power supply with CV+ CC characteristic can be operated at both CV mode (with LED driver, at area (A) and CC mode (direct drive, at area (B).




Typical LED power supply I-V curve

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.



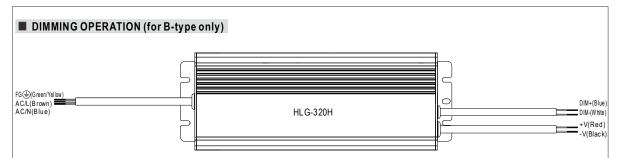

- ※ Built-in 3 in 1 dimming function, IP67 rated. Output constant current level can be adjusted through output cable by connecting a resistance or 1 ~ 10Vdc or 10V PWM signal between DIM+ and DIM-.
- ※ Please DO NOT connect "DIM-" to "-V"
- $\ensuremath{\,\times\,} \ensuremath{\,\text{Reference}}\xspace \ensuremath{\,\text{resistance}}\xspace \ensuremath{\,\text{value}}\xspace \ensuremath{\,\text{for output current}}\xspace \ensuremath{\,\text{adjustment}}\xspace \ensuremath{\,\text{(Typical)}}\xspace$

Resistance	Single driver	10K Ω	20 Κ Ω	30 K Ω	40 K Ω	50K Ω	60KΩ	70K Ω	80KΩ	90KΩ	100K Ω	OPEN
value	Multiple drivers (N=driver quantity for synchronized dim ming operation)	10KΩ/N	20K Ω /N	30K Ω /N	40K Ω /N	50K Ω /N	60K Ω /N	70K Ω /N	80K Ω /N	90K Ω /N	100KΩ/N	
Percentage	e of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

※ 1 ~ 10V dimming function for output current adjustment (Typical)


Dimming value	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

¾ 10V PWM signal for output current adjustment (Typical): Frequency range: 100 HZ ~ 3KHz

		•	,		, ,						
Duty value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

- **Using the built-in dimming function on B-type model can't turn the lighting fixture totally dark. Please refer to the connection method below to achieve 0% brightness of the lighting fixture connecting to the LED power supply unit.
- *Direct connecting to LEDs is suggested, but is not suitable for using additional drivers.

 $Dimming\ connection\ diagram\ for\ turning\ the\ lighting\ fixture\ ON/OFF:$

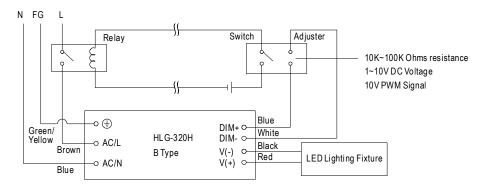

Using a switch and relay can turn ON/OFF the lighting fixture.

- 1. Output constant current level can be adjusted through output cable by connecting a resistance or 1~10Vdc or 10V PWM signal between DIM+ and DIM-.
- 2. The LED lighting fixture can be turned ON/OFF by the switch.



