

HLG-240H series



Features :

- Universal AC input / Full range (up to 305VAC)
- Built-in active PFC function
- Protections: Short circuit / Over current / Over voltage / Over temperature
- Cooling by free air convection
- OCP point adjustable through output cable or internal potentiometer
- IP67 / IP65 design for indoor or outdoor installations
- Three in one dimming function (1~10Vdc or PWM signal or resistance)
- Suitable for LED lighting and street lighting applications
- · Compliance to worldwide safety regulations for lighting
- Suitable for dry / damp / wet locations
- 5 years warranty (Note.10)




HLG-240H-12 \fbox{A} Blank : IP67 rated. Cable for I/O connection.

- A : IP65 rated. Output voltage and constant current level can be adjusted through internal potentiometer.
- B : IP67 rated. Constant current level adjustable through output cable with 1~10Vdc or 10V PWM signal or resistance.
- C : Terminal block for I/O connection. Output voltage and constant current level can be adjusted through internal potentiometer.
- D (option, safety pending) : IP67 rated. Timer dimming function, contact MEAN WELL for details.


MODEL	ATION	HI G.240H-12	HLG-240H-15	HLG-240H-20	HLG-240H-24	HI G-240H-30	HLG-240H-36	HLG-240H-42	HLG-240H-48	HLG-240H-54		
MODEL	DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V		
	CONSTANT CURRENT REGION Note.4		7.5 ~ 15V	10 ~ 20V	12 ~ 24V	15 ~ 30V	18 ~ 36V	42 V 21 ~ 42V	40 v 24 ~ 48V	27 ~ 54V		
		16A	15A	10~20V	12 ~ 24V	15 ~ 50V 8A	6.7A	5.72A	24~40V	4.45A		
	RATED CURRENT RATED POWER	16A 192W	15A 225W	12A 240W	240W	240W	241.2W	240.24W	240W	240.3W		
	RIPPLE & NOISE (max.) Note.2	-	150mVp-p	150mVp-p	150mVp-p	240W 200mVp-p	250mVp-p	250mVp-p	240W 250mVp-p	350mVp-p		
	VOLTAGE ADJ. RANGE Note.6						33.5 ~ 38.5V	39 ~ 45V	44.8 ~ 51.2V			
OUTPUT	VOLTAGE ADJ. RANGE Note.6	11.2 ~ 12.8V 14 ~ 16V 18.6 ~ 21.4V 22.4 ~ 25.6V 28 ~ 32V 33.5 ~ 38.5V 39 ~ 45V 44.8 ~ 51.2V 50 ~ 57V Can be adjusted by internal potentiometer A type and C type only										
001901	CURRENT ADJ. RANGE	8~16A 7.5~15A 6~12A 5~10A 4~8A 3.3~6.7A 2.86~5.72A 2.5~5A 2.23~4.45A										
	VOLTAGE TOLERANCE Note.3		±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%		
	LINE REGULATION	±0.5%	±0.5%	± 0.5%	±0.5%	±0.5%	±0.5%	± 0.5%	±0.5%	± 1.0%		
		±0.5%	±0.5%	± 1.0%	±0.5%	$\pm 0.5\%$ $\pm 0.5\%$	±0.5%	±0.5%	±0.5%	±0.5%		
				I	I		1 - 0.3 %	1 - 0.3 /0	-0.5%	0.570		
		1000ms,80ms/115VAC 500ms,80ms/230VAC at full load 15ms at full load 230VAC /115VAC										
	HOLD UP TIME (Typ.) VOLTAGE RANGE Note.5											
		90 ~ 305 VAC 127 ~ 43 TVDC 47 ~ 63Hz										
	FREQUENCY RANGE	PF>0.98/115VAC, PF>0.95/230VAC at full load (Please refer to "Power Factor Characteristic" curve)										
INPUT	POWER FACTOR (Typ.) TOTAL HARMONIC DISTORTION											
	EFFICIENCY (Typ.)											
	(),				92.5%	92.5%	92.5%	92.5%	93 %	93.5%		
	AC CURRENT (Typ.)	4A / 115VAC 2A / 230VAC 1.2A / 277VAC										
	INRUSH CURRENT (Typ.)	COLD START 75A(twidth=570µs measured at 50% lpeak) at 230VAC										
	LEAKAGE CURRENT OVER CURRENT Note.4	<0.75mA/277VAC										
		95~108%										
		Protection type : Constant current limiting, recovers automatically after fault condition is removed										
PROTECTION	SHORT CIRCUIT	Hiccup mode, recovers automatically after fault condition is removed 13.5 ~ 18V 17.5 ~ 21.5V 23.5 ~ 27.5V 27 ~ 34V 33 ~ 39V 43 ~ 49V 48 ~ 54V 55 ~ 63V 60 ~ 67V										
	OVER VOLTAGE					33 ~ 39V	43 ~ 49V	48 ~ 54V	55 ~ 63V	60 ~ 67V		
		Protection type : Shut down and latch off o/p voltage, re-power on to recover										
	OVER TEMPERATURE	Shut down o/p voltage, recovers automatically after temperature goes down										
	WORKING TEMP.	-40 ~ +70°C (Refer to "Derating Curve")										
	WORKING HUMIDITY	20 ~ 95% RH non-condensing										
ENVIRONMENT	STORAGE TEMP., HUMIDITY	-40~+80°C,										
	TEMP. COEFFICIENT	±0.03%/°C (0~50°C)										
	VIBRATION		,	le, period for 7		• • •						
	SAFETY STANDARDS Note.7	UL1012, CAN/CSA-C22.2 No. 107.1-01, UL8750, CSA C22.2 No. 250.0-08, TUV EN61347-1, EN61347-2-13 independent										
		(except for HLG-240H C type), UL60950-1, UL8750, TUV EN60950-1, IP65 or IP67, J61347-1, J61347-2-13 approved										
SAFETY &	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC										
EMC	ISOLATION RESISTANCE	,		00M Ohms / 50								
	EMC EMISSION	Compliance to	EN55015, EN	155022 (CISPF	22) Class B, E	N61000-3-2 C	Class C (≧50%	load); EN610	00-3-3			
	EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11, EN61547, EN55024, light industry level (surge 4KV), criteria B										
	MTBF	207.9K hrs mi	n. MIL-HDB	8K-217F (25℃)								
OTHERS	DIMENSION			HLG-240H-Bla	,		n (L*W*H)(HLG	,				
	PACKING	1.3Kg; 12pcs/	16.6Kg/0.84Cl	JFT(HLG-240-	Blank/A/B)	1.23Kg; 12p	cs/15.8Kg/1.16	CUFT(HLG-24	0-C)			
NOTE	 All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25 °C of ambient temperature. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. Tolerance : includes set up tolerance, line regulation and load regulation. Please refer to "DRIVING METHODS OF LED MODULE". Derating may be needed under low input voltages. Please check the static characteristics for more details. A type and C type only. Safety and EMC design refer to EN60598-1, subject 8750(UL), CNS15233, GB7000.1, FCC part18. Length of set up time is measured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. Refer to warranty statement. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED power supply can only be used behind a switch without permanently connected to the mains. 											



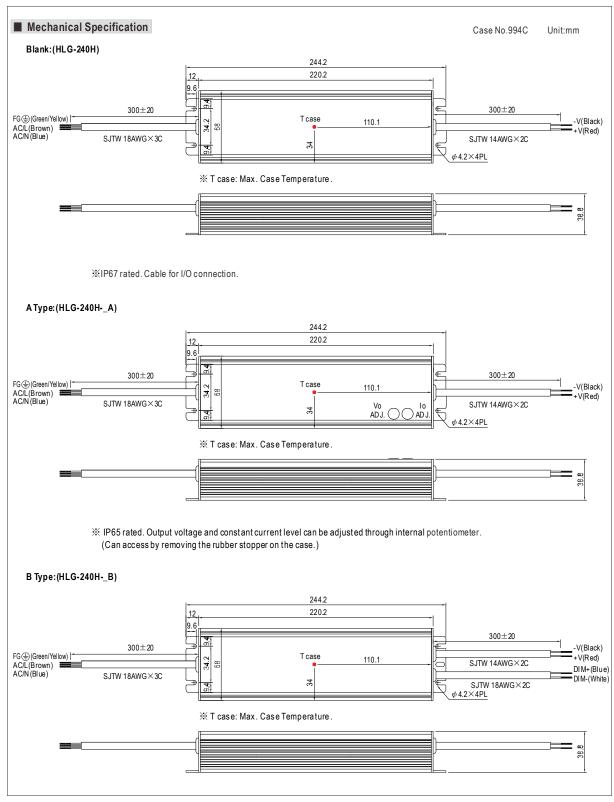




240W Single Output Switching Power Supply

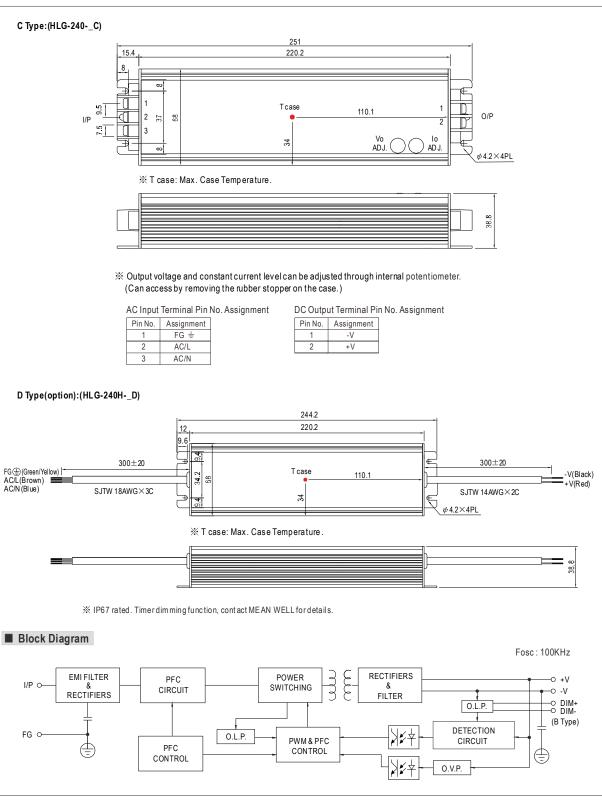



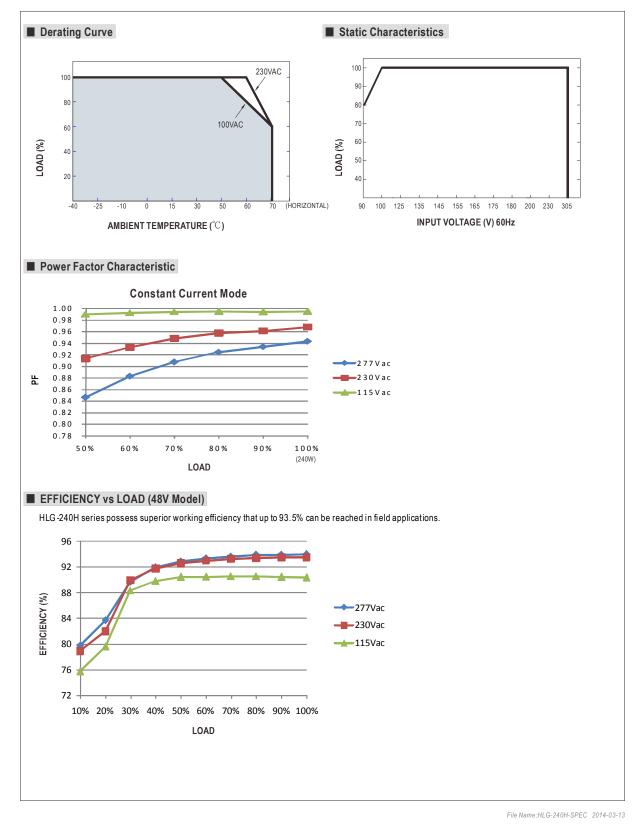




DRIVING METHODS OF LED MODULE

There are two major kinds of LED drive method "direct drive" and "with LED driver". A typical LED power supply may either work in "constant voltage mode (CV) or constant current mode (CC)" to drive the LEDs. Mean Well's LED power supply with CV+ CC characteristic can be operated at both CV mode (with LED driver, at area (A) and CC mode (direct drive, at area (B). In the constant current region, the highest voltage at the output of the driver

depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.



DIMMING OPERATION (for B-type only)



※ Built-in 3 in 1 dimming function, IP67 rated. Output constant current level can be adjusted through output cable by connecting a resistance or 1 ~ 10Vdc or 10V PWM signal between DIM+ and DIM-.

※ Please DO NOT connect "DIM-" to "-V".

% Reference resistance value for output current adjustment (Typical)

Resistance value	Single driver	10K Ω	20K Ω	30K Ω	40K Ω	50K Ω	60K Ω	70K Ω	80K Ω	90K Ω	$100 \mathrm{K}\Omega$	OPEN
	Multiple drivers (N=driver quantity fors ynchronized dim ming operation)	10K Ω/N	20K Ω/N	30K Ω/N	40K Ω/N	50K Ω/N	60K Ω/N	70K Ω/N	80K Ω/N	90K Ω/N	100K Ω/N	
Percentage	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%	
% 1 ~ 10V dimming function for output current adjustment (Typical)												
Dimming value		1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
Percentage of rated current		10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%
※ 10V PWM signal for output current adjustment (Typical): Frequency range : 100Hz ~ 3KHz												

Dutyvalue 10% 20% 30% 40% 50% 60% 70% 80% 90% 100% OPEN Percentage of rated current 10% 20% 30% 40% 50% 60% 70% 80% 90% 100% 95%~108%

% Using the built-in dimming function on B-type model can't turn the lighting fixture totally dark. Please refer to the connection method below to achieve 0% brightness of the lighting fixture connecting to the LED power supply unit.

% Direct connecting to LEDs is suggested, but is not suitable for using additional drivers.

Dimming connection diagram for turning the lighting fixture ON/OFF :

N FG Т Switch Adjuster Relay 10K~100K Ohms resistance 1~10V DC Voltage 10V PWM Signal Blue -0 🕀 DIM+ . റ Green/ Yellow White HLG-240H DIM- 0--o AC/L Black Brown V(-) 0 В Туре Red LED Lighting Fixture V(+) -O AC/N 0 Blue

Using a switch and relay can tum ON/OFF the lighting fixture.

1. Output constant current level can be adjusted through output cable by connecting a resistance or 1~10Vdc or 10V PWM signal between DIM+ and DIM-. 2. The LED lighting fixture can be turned ON/OFF by the switch.



