
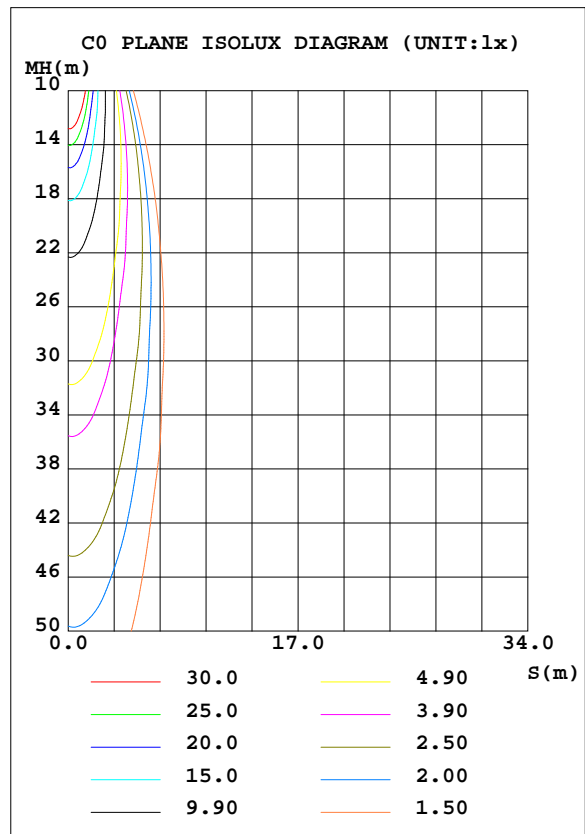


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.00V I:0.0799A P:8.4986W PF:0.4834 Freq:50.00Hz Lamp Flux:785.623x1 lm		
NAME: LED Garden Lamp	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Futlight Optoelectronics Co.,Ltd	SUR.:	Shielding Angle:N/A

DATA OF LAMP		PHOTOMETRIC DATA Eff: 92.44 lm/W			
MODEL	FUTC02	I _{max} (cd)	4917	S/MH(C0/180)	0.28
NOMINAL POWER(W)	9	LOR(%)	100.0	S/MH(C90/270)	0.28
RATED VOLTAGE(V)	100-240	TOTAL FLUX(lm)	785.62	η UP, DN(C0-180)	0.1,51.9
NOMINAL FLUX(lm)	785.623	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.1,47.9
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	220	η down(%)	99.8	CIBSE SHR MAX	1.00

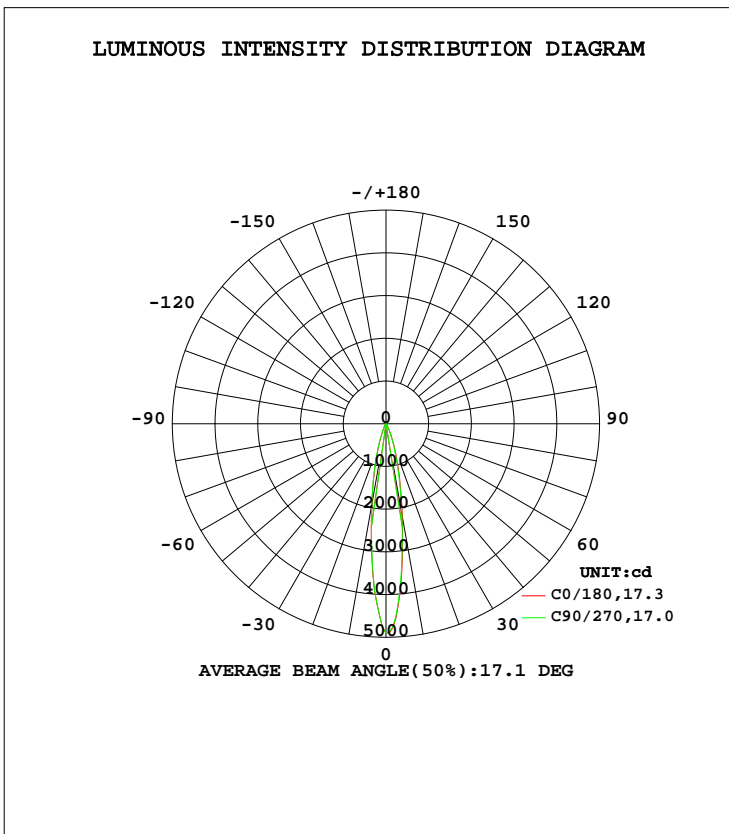

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2019-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.366
 Humidity:65.7%
 Test Distance:26.000m [K=1.3952]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	2215	2260	2152	2047	1916	1856	1911	2054	0- 10	297.2	297.2	37.8,37.8
20	549.3	557.0	500.7	442.4	419.6	406.8	440.9	506.9	10- 20	292.7	589.9	75.1,75.1
30	97.65	98.67	89.40	83.27	82.54	80.14	81.37	90.92	20- 30	100.1	689.9	87.8,87.8
40	39.84	38.89	37.79	37.43	36.99	36.56	37.32	38.22	30- 40	33.96	723.9	92.1,92.1
50	27.83	27.23	26.10	26.48	26.31	25.80	26.36	26.47	40- 50	24.31	748.2	95.2,95.2
60	19.09	18.69	15.62	17.87	16.91	16.05	15.20	17.67	50- 60	19.86	768.1	97.8,97.8
70	9.056	8.194	7.319	7.738	7.465	6.188	6.051	7.215	60- 70	11.90	780.0	99.3,99.3
80	1.929	1.564	1.037	1.423	0.8825	0.2212	0.0725	0.5867	70- 80	4.088	784.0	99.8,99.8
90	0	0	0	0	0	0	0	0	80- 90	0.1903	784.2	99.8,99.8
100	0	0	0	0	0	0	0	0	90-100	0	784.2	99.8,99.8
110	0	0	0	0	0	0	0	0	100-110	0	784.2	99.8,99.8
120	0	0	0	0	0	0	0	0	110-120	0	784.2	99.8,99.8
130	0	0	0	0	0	0	0	0	120-130	0	784.2	99.8,99.8
140	0	0	0	0	0	0	0	0	130-140	0	784.2	99.8,99.8
150	0	0	0	0	0.5208	0.3719	0.2964	0.2270	140-150	0.0219	784.3	99.8,99.8
160	1.187	1.179	1.182	1.484	2.447	2.215	2.001	1.860	150-160	0.3438	784.6	99.9,99.9
170	2.594	2.798	2.807	3.047	3.189	3.246	3.399	3.349	160-170	0.7071	785.3	100,100
180	3.337	3.172	3.547	3.645	3.189	3.246	3.621	3.422	170-180	0.3122	785.6	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 736.58 lm

%lum = 93.8%
%lamp = 93.8%

Conical surface Flux(120deg): 768.06 lm


%lum = 97.8%
%lamp = 97.8%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:24.5DEG
Operators:William
Test Date:2019-06-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.366
Humidity:65.7%
Test Distance:26.000m [K=1.3952]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.00V I:0.0799A P:8.4986W PF:0.4834 Freq:50.00Hz Lamp Flux:785.623x1 lm		
NAME: LED Garden Lamp	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Futlight Optoelectronics Co.,Ltd	SUR.:	Shielding Angle:N/A

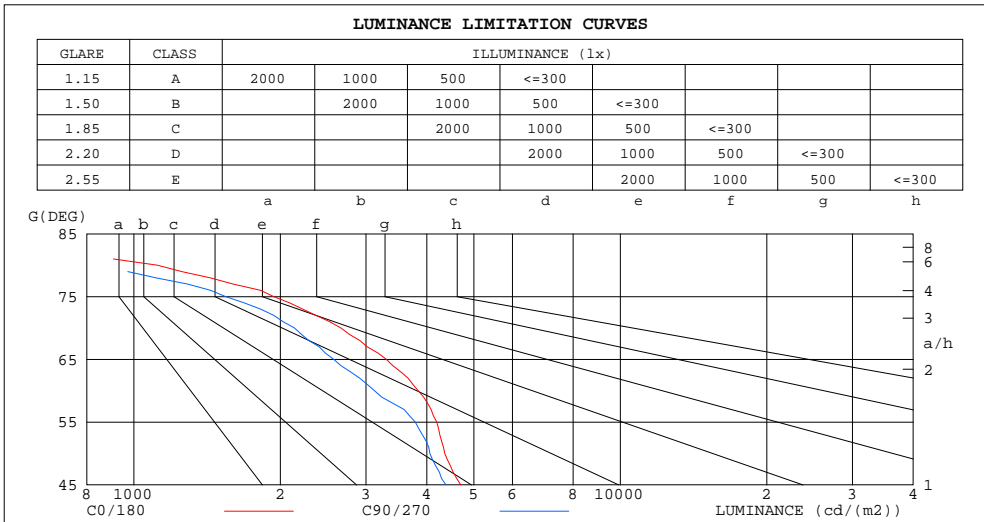

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	259	1
80	1118	597
75	1937	1544
70	2664	2139
65	3302	2575
60	3842	3122
55	4192	3789
50	4356	4058
45	4698	4382


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2019-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.366
 Humidity:65.7%
 Test Distance:26.000m [K=1.3952]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.00V I:0.0799A P:8.4986W PF:0.4834 Freq:50.00Hz Lamp Flux:785.623x1 lm		
NAME: LED Garden Lamp	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Futlight Optoelectronics Co.,Ltd	SUR.:	Shielding Angle:N/A

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.12	1.10	1.08	1.10	1.08	1.07	1.06	1.05	1.03	1.02	1.01	1.00	.99	.98	.97	.96
2.0	1.06	1.03	1.00	1.05	1.02	.99	1.01	.99	.97	.99	.97	.95	.96	.94	.93	.91
3.0	1.01	.97	.94	.90	.96	.93	.97	.94	.92	.95	.93	.90	.93	.91	.89	.88
4.0	.97	.93	.89	.96	.92	.89	.94	.90	.88	.92	.89	.87	.90	.88	.86	.84
5.0	.93	.89	.85	.92	.88	.85	.90	.87	.84	.89	.86	.83	.87	.85	.83	.81
6.0	.90	.85	.82	.89	.85	.82	.87	.84	.81	.86	.83	.81	.85	.82	.80	.79
7.0	.87	.82	.79	.86	.82	.79	.85	.81	.78	.84	.80	.78	.83	.80	.78	.76
8.0	.84	.79	.76	.83	.79	.76	.82	.79	.76	.81	.78	.76	.81	.78	.75	.74
9.0	.81	.77	.74	.81	.77	.74	.80	.76	.74	.79	.76	.74	.79	.76	.73	.72
10.0	.79	.75	.72	.79	.75	.72	.78	.74	.72	.77	.74	.72	.77	.74	.71	.71

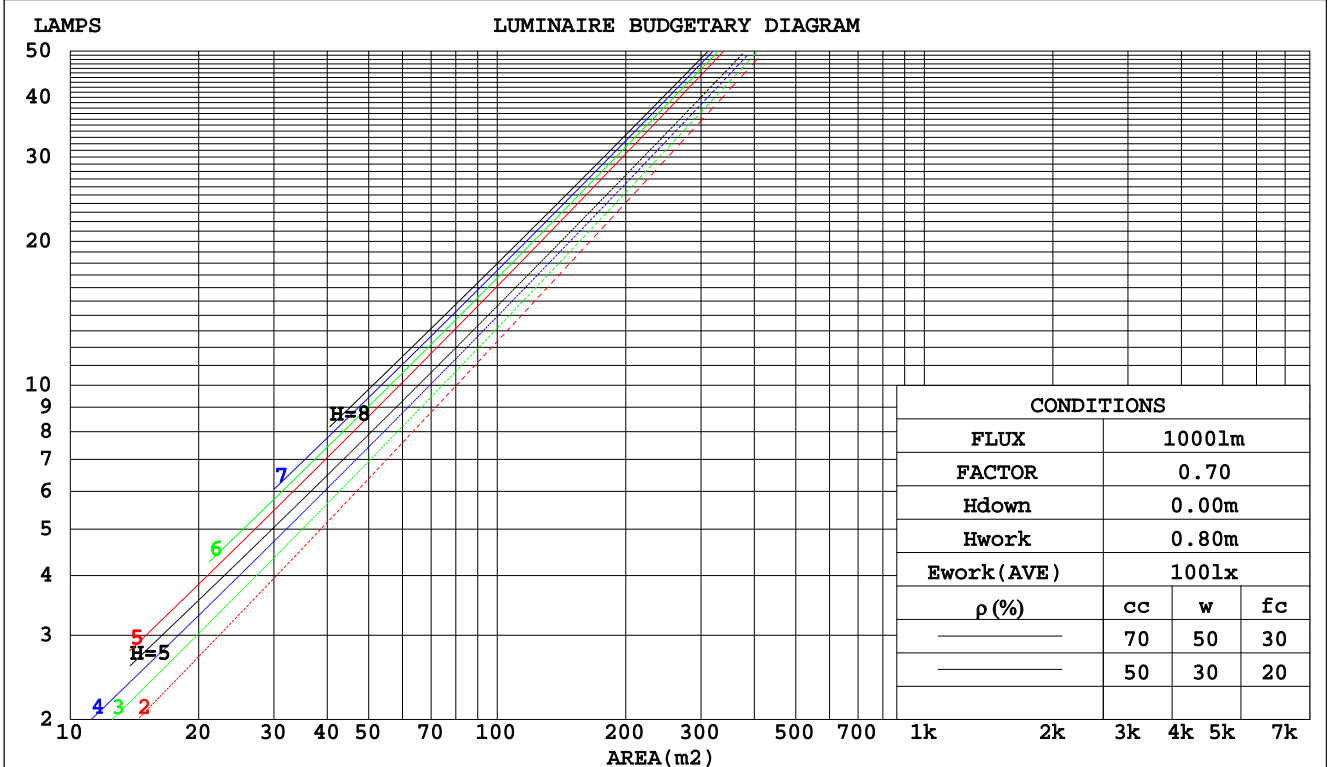

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2019-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.366
 Humidity:65.7%
 Test Distance:26.000m [K=1.3952]
 Remarks:

WEC AND CCEC

Test:U:220.00V I:0.0799A P:8.4986W PF:0.4834 Freq:50.00Hz Lamp Flux:785.623x1 lm		
NAME: LED Garden Lamp	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Futlight Optoelectronics Co.,Ltd	SUR.:	Shielding Angle:N/A

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.149	.085	.027	.142	.081	.026	.130	.074	.024	.118	.068	.022	.107	.062	.020	
2.0	.139	.076	.023	.134	.074	.023	.123	.069	.021	.114	.064	.020	.105	.059	.019	
3.0	.130	.069	.021	.125	.067	.020	.116	.063	.019	.108	.059	.018	.101	.056	.017	
4.0	.121	.063	.019	.117	.061	.018	.110	.058	.017	.103	.055	.017	.097	.052	.016	
5.0	.114	.058	.017	.110	.057	.016	.104	.054	.016	.098	.052	.015	.092	.049	.015	
6.0	.107	.054	.015	.104	.053	.015	.099	.050	.015	.093	.049	.014	.089	.047	.014	
7.0	.101	.050	.014	.098	.049	.014	.094	.047	.014	.089	.046	.013	.085	.044	.013	
8.0	.096	.047	.013	.093	.046	.013	.089	.045	.013	.085	.043	.012	.082	.042	.012	
9.0	.091	.044	.012	.089	.043	.012	.085	.042	.012	.082	.041	.012	.079	.040	.012	
10.0	.087	.042	.012	.085	.041	.011	.082	.040	.011	.079	.039	.011	.076	.038	.011	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.171	.159	.148	.146	.136	.128	.100	.094	.088	.057	.054	.051	.018	.017	.017	
2.0	.153	.134	.118	.131	.115	.102	.090	.080	.071	.052	.046	.042	.017	.015	.014	
3.0	.139	.115	.096	.119	.099	.083	.082	.069	.058	.047	.040	.034	.015	.013	.011	
4.0	.127	.100	.079	.109	.086	.068	.075	.060	.048	.043	.035	.029	.014	.011	.009	
5.0	.116	.087	.066	.100	.076	.057	.069	.053	.040	.040	.031	.024	.013	.010	.008	
6.0	.107	.077	.056	.092	.067	.049	.064	.047	.034	.037	.028	.020	.012	.009	.007	
7.0	.100	.069	.048	.086	.060	.042	.059	.042	.030	.034	.025	.018	.011	.008	.006	
8.0	.093	.063	.042	.080	.054	.036	.056	.038	.026	.032	.022	.015	.010	.007	.005	
9.0	.087	.057	.036	.075	.049	.032	.052	.035	.023	.030	.021	.013	.010	.007	.004	
10.0	.082	.052	.032	.071	.045	.028	.049	.032	.020	.029	.019	.012	.009	.006	.004	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2019-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.366
 Humidity:65.7%
 Test Distance:26.000m [K=1.3952]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.00V I:0.0799A P:8.4986W PF:0.4834 Freq:50.00Hz Lamp Flux:785.623x1 lm										
NAME: LED Garden Lamp					TYPE:LED			WEIGHT:N/A		
SPEC.:N/A					DIM.:			SERIAL No.:N/A		
MFR.: Futlight Optoelectronics Co.,Ltd					SUR.:			Shielding Angle:N/A		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	11.9	12.6	12.1	12.7	12.9	11.3	12.0	11.5	12.1	12.3
3H	12.8	13.5	13.1	13.7	13.9	12.0	12.7	12.2	12.8	13.0
4H	13.0	13.7	13.3	13.9	14.1	12.2	12.8	12.5	13.0	13.2
6H	13.1	13.7	13.4	13.9	14.2	12.2	12.8	12.5	13.0	13.3
8H	13.1	13.6	13.4	13.9	14.1	12.2	12.8	12.5	13.0	13.3
12H	13.0	13.6	13.3	13.8	14.1	12.1	12.7	12.4	13.0	13.2
4H 2H	12.3	12.9	12.6	13.2	13.4	11.8	12.5	12.1	12.7	12.9
3H	13.4	13.9	13.7	14.2	14.4	12.6	13.2	13.0	13.5	13.7
4H	13.6	14.1	14.0	14.4	14.7	12.9	13.4	13.2	13.7	14.0
6H	13.7	14.2	14.1	14.5	14.8	12.9	13.4	13.3	13.7	14.1
8H	13.7	14.1	14.1	14.5	14.8	12.9	13.3	13.3	13.7	14.0
12H	13.6	14.0	14.0	14.4	14.8	12.8	13.2	13.2	13.6	14.0
8H 4H	13.6	14.0	14.0	14.4	14.8	12.9	13.3	13.3	13.7	14.1
6H	13.7	14.1	14.1	14.5	14.9	13.0	13.3	13.4	13.7	14.2
8H	13.7	14.0	14.1	14.4	14.9	12.9	13.3	13.4	13.7	14.1
12H	13.6	13.9	14.1	14.3	14.8	12.9	13.2	13.4	13.6	14.1
12H 4H	13.6	14.0	14.0	14.3	14.7	12.9	13.3	13.3	13.6	14.0
6H	13.7	14.0	14.1	14.4	14.8	12.9	13.3	13.4	13.7	14.1
8H	13.6	13.9	14.1	14.4	14.8	12.9	13.2	13.4	13.6	14.1
Variations with the observer position at spacings:										
S = 1.0H	+ 0.3 / - 0.4					+ 0.3 / - 0.5				
1.5H	+ 0.2 / - 0.3					+ 0.3 / - 0.5				
2.0H	+ 0.5 / - 0.5					+ 0.6 / - 1.0				

CIE Pub.117, 785.6 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -0.8)

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2019-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.366
 Humidity:65.7%
 Test Distance:26.000m [K=1.3952]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.00V I:0.0799A P:8.4986W PF:0.4834 Freq:50.00Hz Lamp Flux:785.623x1 lm		
NAME: LED Garden Lamp	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Futlight Optoelectronics Co.,Ltd	SUR.:	Shielding Angle:N/A


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	87	80	76	86	80	76	85	80	76	72
0.80	94	88	84	93	88	84	92	87	84	80
1.00	99	93	89	98	92	89	96	92	88	84
1.25	103	97	94	101	97	93	99	95	92	88
1.50	105	100	97	104	100	96	102	98	95	91
2.00	108	104	101	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	111	108	105	110	107	104	106	104	102	95
4.00	114	111	109	112	109	107	108	106	104	97
5.00	115	113	111	113	111	109	109	107	106	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2019-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.366
 Humidity:65.7%
 Test Distance:26.000m [K=1.3952]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.00V I:0.0799A P:8.4986W PF:0.4834 Freq:50.00Hz Lamp Flux:785.623x1 lm		
NAME: LED Garden Lamp	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Futlight Optoelectronics Co.,Ltd	SUR.:	Shielding Angle:N/A

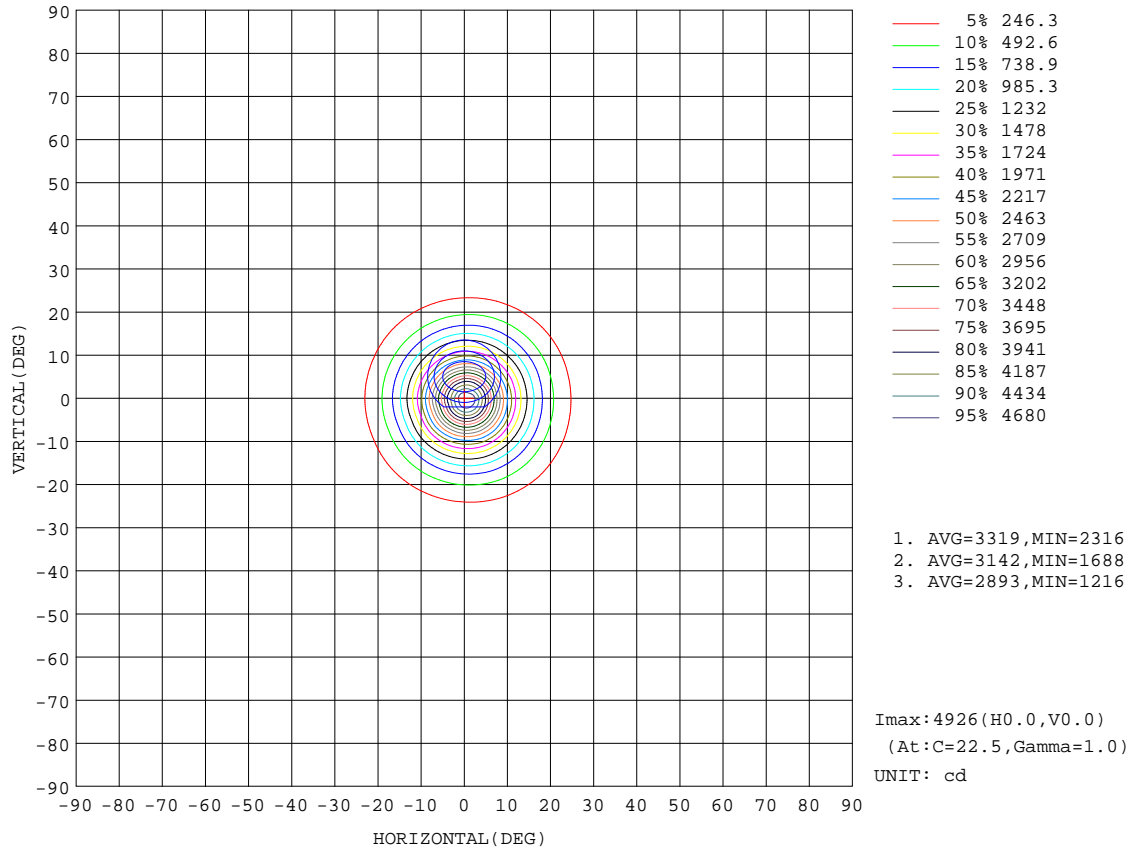


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.5DEG
 Operators: William
 Test Date: 2019-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.366
 Humidity: 65.7%
 Test Distance: 26.000m [K=1.3952]
 Remarks:

AAI Figure

Test:U:220.00V I:0.0799A P:8.4986W PF:0.4834 Freq:50.00Hz Lamp Flux:785.623x1 lm		
NAME: LED Garden Lamp	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Futlight Optoelectronics Co.,Ltd	SUR.:	Shielding Angle:N/A

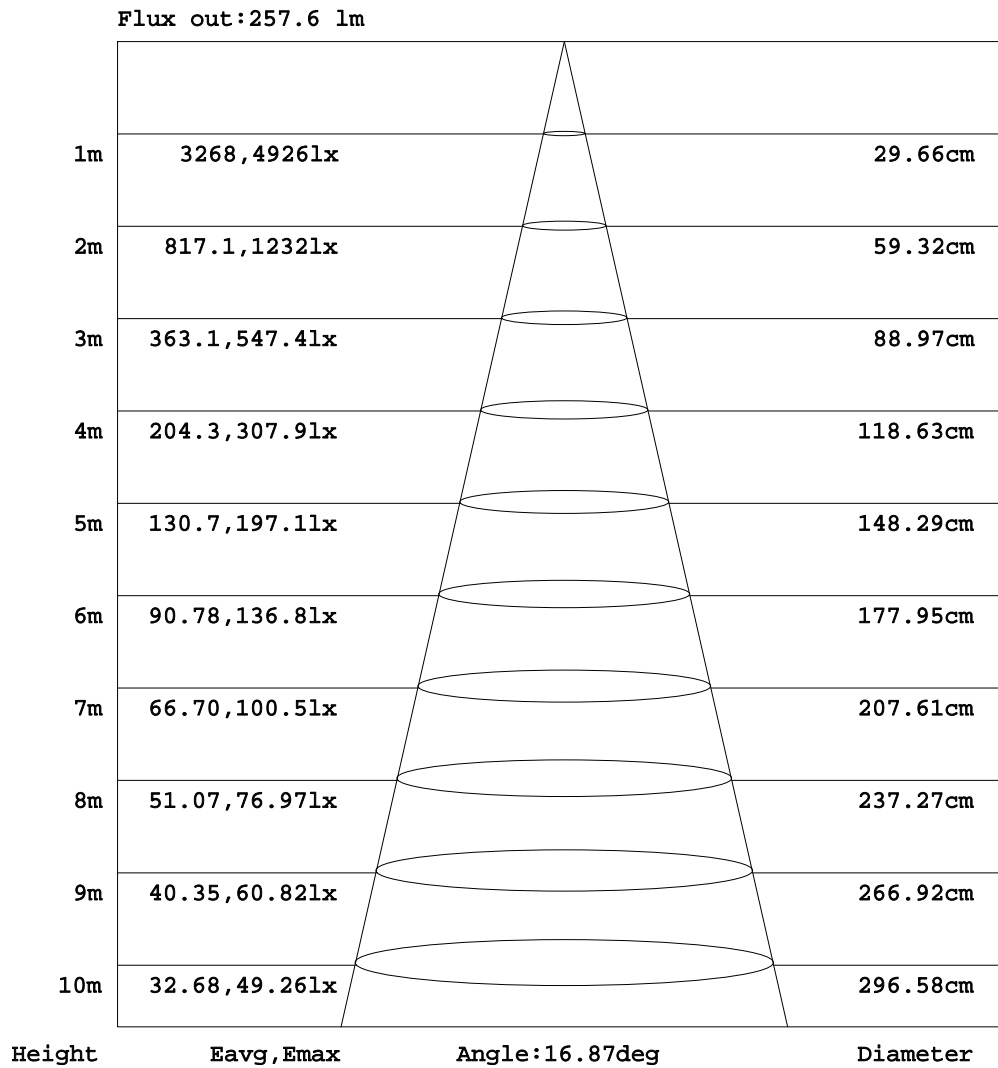


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2019-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.366
 Humidity:65.7%
 Test Distance:26.000m [K=1.3952]
 Remarks:

ISOLUX DIAGRAM


Test:U:220.00V I:0.0799A P:8.4986W PF:0.4834 Freq:50.00Hz Lamp Flux:785.623x1 lm		
NAME: LED Garden Lamp	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Futlight Optoelectronics Co.,Ltd	SUR.:	Shielding Angle:N/A

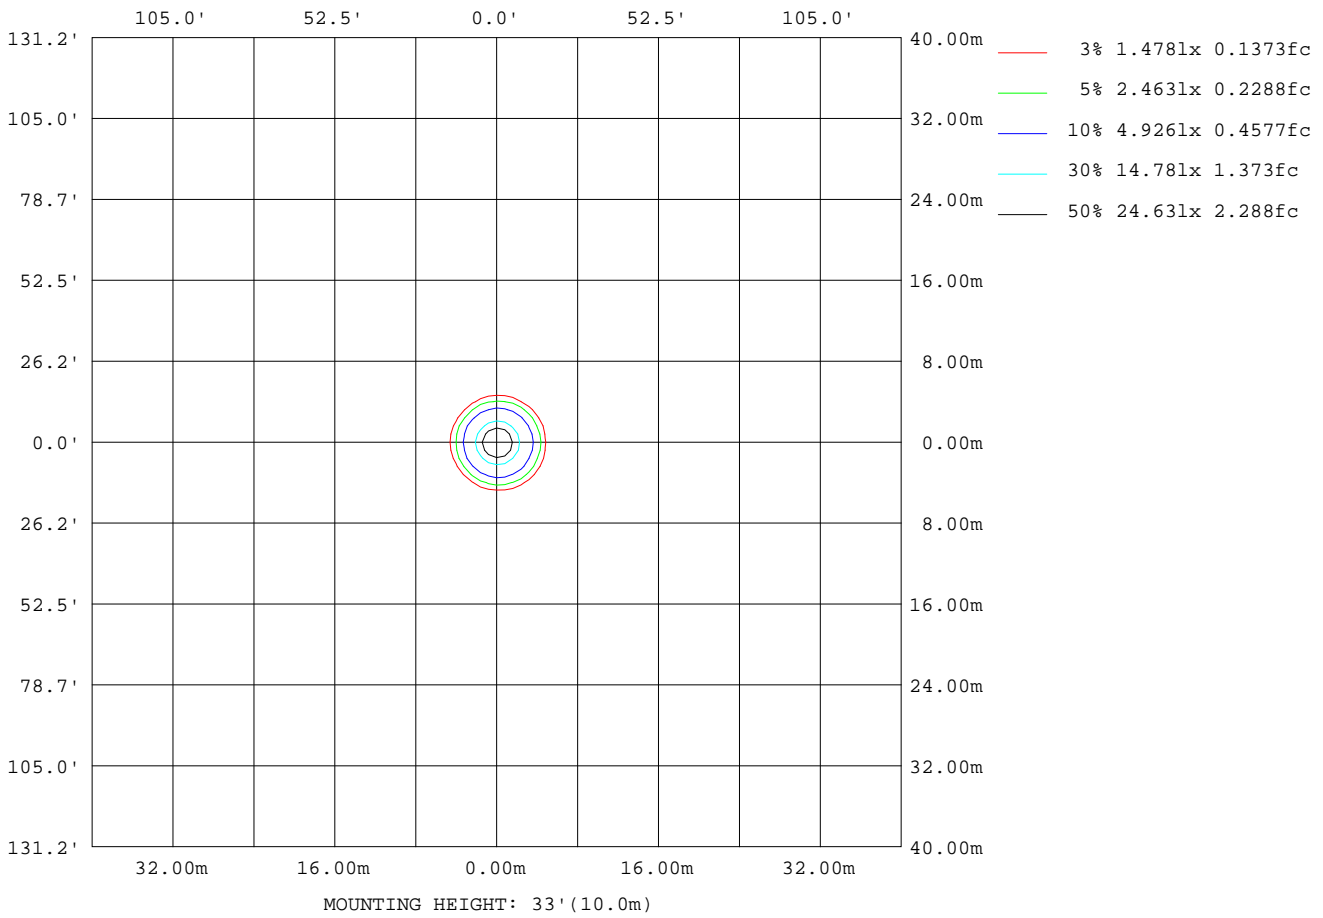

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2019-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.366
 Humidity:65.7%
 Test Distance:26.000m [K=1.3952]
 Remarks:

Planar Illuminance Curve

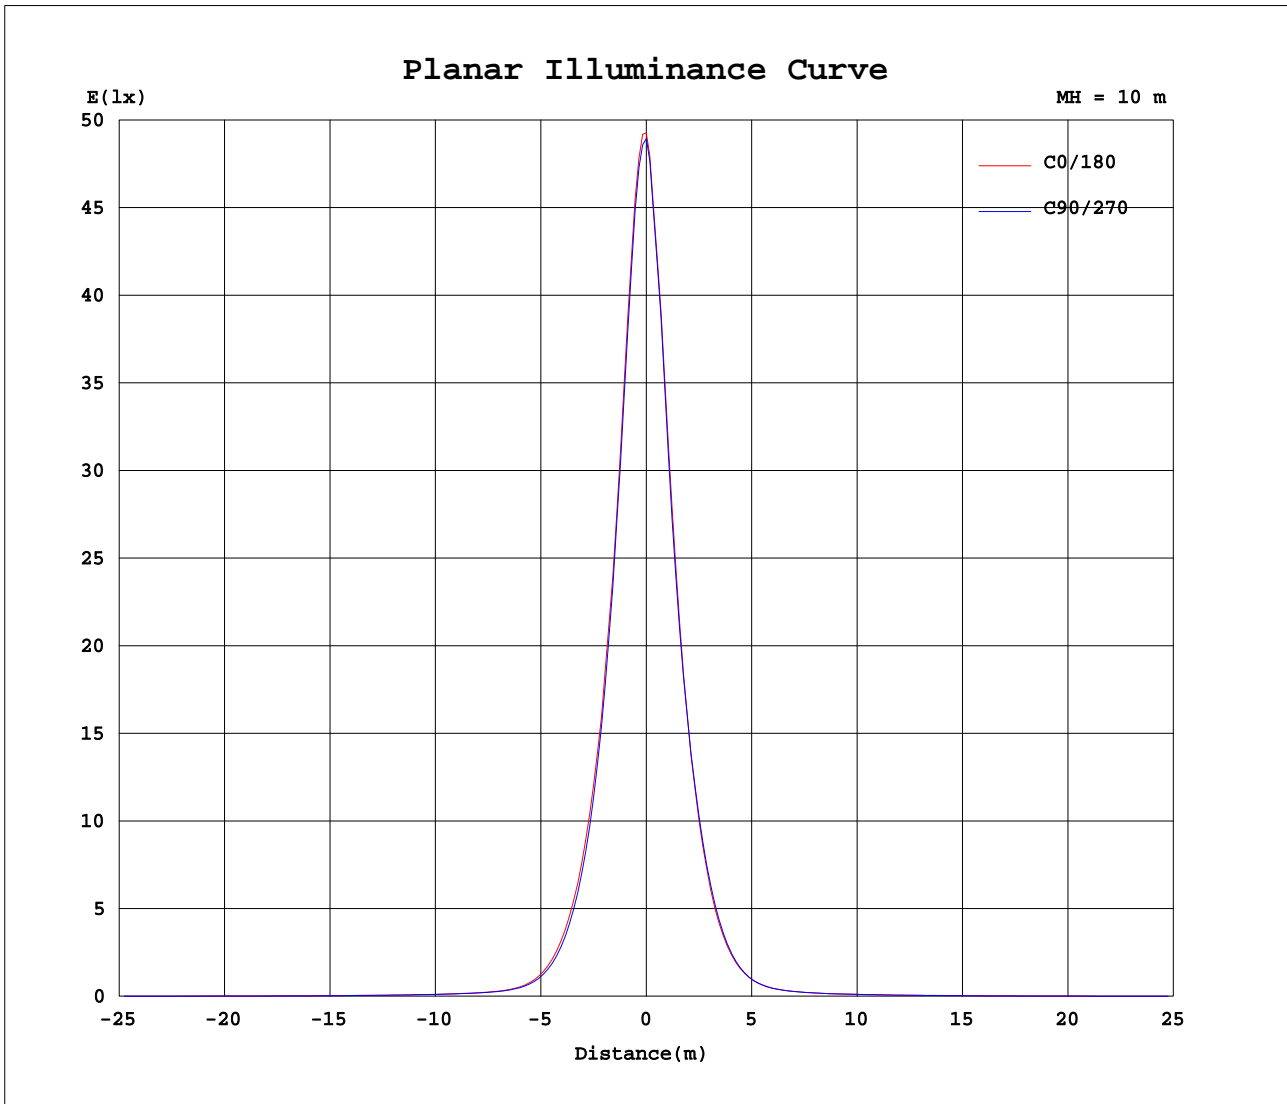

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 24.5DEG
Operators: William
Test Date: 2019-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.366
Humidity: 65.7%
Test Distance: 26.000m [K=1.3952]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.00V I:0.0799A P:8.4986W PF:0.4834 Freq:50.00Hz Lamp Flux:785.623x1 lm		
NAME: LED Garden Lamp	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Futlight Optoelectronics Co.,Ltd	SUR.:	Shielding Angle:N/A

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	4896	4896	4896	4896	4896	4896	4896	4896	4896	4896	4896	4896	4896	4896	4896	4896			
5	3892	3942	3942	3917	3838	3763	3670	3568	3539	3496	3453	3465	3520	3609	3728	3887			
10	2215	2251	2260	2239	2152	2091	2047	1967	1916	1882	1856	1875	1911	1981	2054	2157			
15	1151	1165	1162	1137	1082	1033	993	949	951	928	927	949	985	1033	1086	1131			
20	549	558	557	537	501	467	442	417	420	409	407	418	441	474	507	540			
25	233	240	239	226	208	193	183	174	176	170	169	172	180	194	212	227			
30	97.6	99.4	98.7	95.9	89.4	85.3	83.3	81.3	82.5	81.0	80.1	79.7	81.4	85.2	90.9	96.3			
35	54.0	54.0	53.3	52.9	51.1	50.3	49.8	49.4	50.0	49.4	49.0	49.4	50.0	50.8	52.2	53.8			
40	39.8	39.3	38.9	38.6	37.8	37.8	37.4	37.0	37.0	36.5	36.6	36.7	37.3	37.6	38.2	38.9			
45	33.0	32.5	31.9	31.7	31.0	31.0	30.9	30.7	30.9	30.3	30.3	30.7	31.1	31.1	31.2	31.9			
50	27.8	27.8	27.2	26.6	26.1	26.2	26.5	26.5	26.3	25.9	25.8	25.8	26.4	26.5	26.5	26.9			
55	23.9	24.0	23.4	22.4	21.7	22.1	22.5	22.6	21.9	21.8	21.4	21.2	22.2	22.0	22.5	22.9			
60	19.1	19.2	18.7	17.3	15.6	17.0	17.9	17.8	16.9	16.9	16.0	15.8	15.2	16.7	17.7	18.4			
65	13.9	14.1	13.6	11.5	10.9	11.3	12.7	12.6	11.8	11.6	10.9	9.88	10.0	10.9	12.2	13.2			
70	9.06	8.97	8.19	7.53	7.32	7.20	7.74	7.72	7.47	6.94	6.19	5.93	6.05	6.38	7.21	8.07			
75	4.98	4.83	4.06	4.46	4.00	3.94	3.88	3.94	3.69	3.59	2.43	2.73	2.88	3.03	3.42	3.92			
80	1.93	1.78	1.56	1.65	1.04	1.35	1.42	1.28	0.88	0.51	0.22	0.30	0.07	0.44	0.59	1.02			
85	0.22	0.00	0.07	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.00	0.07	0.00	0.07	0.00	0.00	0.00			
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.52	0.52	0.37	0.37	0.30	0.30	0.23	0.30			
155	0.37	0.37	0.15	0.22	0.29	0.29	0.52	0.37	1.34	1.19	1.18	1.12	0.89	0.89	0.82	0.97			
160	1.19	1.33	1.18	1.26	1.18	1.19	1.48	1.33	2.45	2.29	2.21	2.16	2.00	2.01	1.86	2.00			
165	2.22	2.43	2.28	2.23	2.44	2.23	2.38	2.37	3.19	3.33	3.32	3.35	2.96	3.12	2.98	3.04			
170	2.59	2.66	2.80	2.89	2.81	2.74	3.05	2.82	3.19	3.33	3.25	3.42	3.40	3.19	3.35	3.41			
175	3.18	3.18	3.10	3.49	3.55	3.34	3.57	3.48	3.19	3.33	3.25	3.42	3.69	3.56	3.42	3.56			
180	3.34	3.25	3.17	3.64	3.55	3.42	3.64	3.56	3.19	3.33	3.25	3.19	3.62	3.56	3.42	3.64			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2019-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.366
 Humidity:65.7%
 Test Distance:26.000m [K=1.3952]
 Remarks: